

FUJITSU

WALL MOUNTED HEAT PUMPS
9 & 12,000 BTU • 9RL2 & 12RL2

UP TO 16 SEER

*For over 35 years, we strive to make
your environment more comfortable!*



WALL MOUNTED HEAT PUMPS

9 & 12,000 BTU • 9RL2 & 12RL2

UP TO 16 SEER

FUNCTION

Stylish, slim and elegant, these popular wall mounted units are designed for single rooms. Indoor units have a clean, aesthetic design and are small but mighty and shorter in length than competing units, helping them blend into any room. These 16-SEER heat pump systems now feature Inverter technology, environmentally friendly R-410A refrigerant, both heating and cooling operation, quiet mode and easy maintenance.

STANDARD FEATURES


- wireless remote control ~*
- sleep timer ~*
- dry mode ~*
- auto louver ~*
- auto mode ~*
- quiet mode ~*
- economy mode ~*
- auto restart/reset ~*
- auto changeover ~*
- low ambient ~*
- cold prevention ~*



INVERTER TECHNOLOGY

Inverter technology allows for modulating the conditioners operation in order to maintain a steady temperature. This electronic power module allows the unit to reach quickly the desired temperature while keeping it constant by running the compressor at the proper revolution to provide the required capacity. When maximum capacity isn't needed, compressor revolution and power decrease, increasing system efficiency. This results in an important decrease in the number of compressor stop/start, a more stable ambient temperature, substantial energy savings and increased life cycle of the unit.

	9RL2	12RL2		
nominal cooling BTU/h	9,000	12,000		
nominal heating BTU/h	10,000	14,000		
HSPF BTU/hW	9.0	9.0		
SEER BTU/hW	16.0	16.0		
EER Clg/Htg	10.8/13.0	10.0/11.5		
cooling operating range °F(°C)	15~115 (-10~46)	15~115 (-10~46)		
heating operating range °F(°C)	15~75 (-10~24)	15~75 (-10~24)		
moisture removal Pt./h(l/h)	1.3 (2.7)	1.8 (3.8)		
voltage/frequency/phase	115/60/1	115/60/1		
recommended fuse size (A)	15	20		
air circulation C.F.M. (m3/h): hi	436 (740)	436 (740)		
medium	353 (600)	353 (600)		
low	265 (450)	265 (450)		
quiet	191 (325)	191 (325)		
noise level dB(A): hi	43/43	43/43		
medium	38/38	38/38		
low	33/33	33/33		
quiet	23/23	23/23		
outdoor noise level dB(A)	47/48	51/51		
current rated (A): cooling	7.5	10.9		
current rated (A): heating	7.0	11.0		
power use rated (kw): cooling	0.83	1.20		
power use rated (kw): heating	0.77	1.21		
fan speeds stage	4 + auto	4 + auto		
air direction: horizontal	manual	manual		
vertical	auto	auto		
air filter	washable	washable		
connection method	flare	flare		
combined max. lgth ft (m)	66 (20)	66 (20)		
max. vertical diff. ft (m)	49 (15)	49 (15)		
conn. pipe diameter in	suc. 3/8	dis. 1/4	suc. 3/8	dis. 1/4
net weight lbs (kg)	16 (7)	64 (29)	16 (7)	69 (31)
dimensions: height in	10 5/16	21 1/4	10 5/16	21 1/4
mm	262	540	262	540
width in	32 9/32	26	32 9/32	26
mm	870	660	870	660
depth in	8 1/8	11 11/32	8 1/8	11 11/32
mm	206	290	206	290
	ASU9RL2 indoor	AOU9RL2 outdoor	ASU12RL2 indoor	AOU12RL2 outdoor

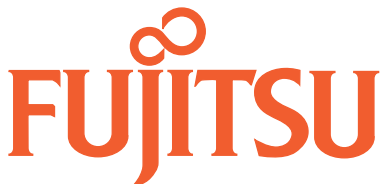

authorized dealer



Fujitsu products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information without notice and without incurring any obligations.

